

PN Single Wheel Castor

- Wheel material: PP core and soft PU tread in black or gray
- Pressed steel wheel supporter
- Ball bearing swivel
- Rigid (one-way rolling) wheel supporter is available



PN50BB-20SC-RDT100AL
(rigid)



PN50-5-PT1
(rigid)



PN64BB-20PCB-PT2
(black brake)



PN125-20PCB-PT8
(black brake)

Item No.	Type	Dia.	W	H	Static Loading Capacity
PN50-1 PN50-20 PN50-5	swivel, non-brake swivel, brake rigid	Ø50mm	20mm	65mm	40kgs / per castor
PN64-1 PN64-20 PN64-6	swivel, non-brake swivel, brake rigid	Ø64mm	24mm	85mm	45kgs / per castor
PN75-1 PN75-20 PN75-5	swivel, non-brake swivel, brake rigid	Ø75mm	24mm	98mm	50kgs / per castor
PN100-1 PN100-20 PN100-5	swivel, non-brake swivel, brake rigid	Ø100mm	24mm	125mm	60kgs / per castor
PN125-1 PN125-20	swivel, non-brake swivel, brake	Ø125mm	28mm	151mm	80kgs / per castor

- Various top fixing stems are available

PN50 Twin Wheel Castor

- With 2 pcs of PN50 (Ø50mm) wheels
- Heavy duty loading: 80kgs / pc
- Steel ball bearing swivel and square top plate stem



PN50-220SCB-PT2A
(black brake)



PN50BB-21BK-PT2A
(non-brake)

Item No.	Type	Dia.	W	H	Static Loading Capacity
PN50-21-PT2A PN50-220-PT2A	swivel, non-brake swivel, brake	Ø50mm	53mm	71mm	80kgs / per castor

Item No. Example



SKA35TC-20PCT-PT1

1

2

3

- | | | |
|---|---------|---|
| 1 | SKA35TC | Wheel type / diameter & color |
| 2 | 20PCT | Brake type / metal wheel support finish & brake color |
| 3 | PT1 | Top fixing stem |

Metal Wheel Support

1) Non-brake type

Item No.	Finish
1SC	satin chrome
1PC	polished chrome
1BN	brushed nickel
1SN	satin nickel
1BK	black



SC



PC



BN



SN



BK

2) Brake type



20PCB-PT2



20SCSY-PT2

Item No.	Finish	Brake color
20SCB	satin chrome	black
20PCB	polished chrome	
20BNB	brushed nickel	
20SNB	satin nickel	
20BKB	black	

Item No.	Finish	Brake color
20SCSY	satin chrome	silver gray
20PCSY	polished chrome	
20BNSY	brushed nickel	
20SNSY	satin nickel	
20BKSY	black	



20BNT-PT2N



7SCSY-PT2

Item No.	Finish	Brake color
20SCT	satin chrome	transparent clear
20PCT	polished chrome	
20BNT	brushed nickel	
20SNT	satin nickel	
20BKT	black	

Double brake type

Item No.	Finish	Brake color
7SCSY	satin chrome	silver gray
7ZPSY	zinc plated	

3) Fixed type, non-swivel (one-way rolling)



55C-PT1



55PC-PT1

Item No.	Finish	Feature
55C	satin chrome	for module I
55PC	polished chrome	
55ZP	brushed nickel	

Item No.	Finish	Feature
55SC	satin chrome	for module II
55PC	polished chrome	
55ZP	brushed nickel	

Top Fixing System


- Top fixing system of metal wheel supporters, swivel type, available for both Module I & Module II castors

a) Top Plate Stem

Item No.	Size (WxL / C.C.)	Application
PT1	42x42 / 32x32mm	for Ø35 & 50mm wheels
PT15	50x50 / 38x38mm	for Ø60mm wheel only
PT2	60x60 / 45x45mm	for Ø64, 75, 80 & 100mm wheels
PT3	52x80 / 32x64mm	for Ø64, 75, 80 & 100mm wheels
PT8	64x92 / 44.5x72mm	for Ø125mm wheel only



b) Threaded Bolt Stem

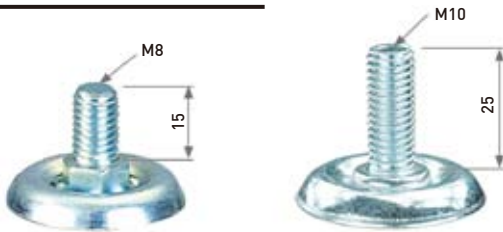

Item No.	Size
T83	M8x15mm
T14	M10x25mm

c) Friction Ring Stem



Code No.	Size
F22	Ø11x22mm

d) Bolt hole Stem, with connecting screws and nuts


- Steel, zinc plated



Item No.	Hole Size
H10	Ø10mm

Item No.	L
H10-30N	30mm
H10-40N	40mm
H10-50N	50mm

Demonstration of installation

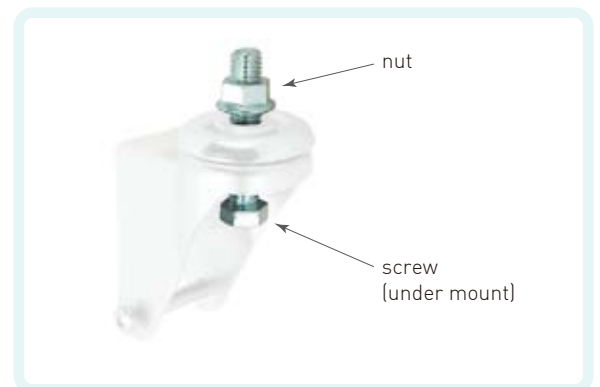

Other metal wheel supporters for specified item

1) For Ø50mm Ball Wheel (SKU50 & SKL50)

2) For Ø50mm Twin Wheel (SKE50 & PN50)



50-61PC-PT1

50-62PCT-PT1



50-21SC-PT2A



50-220PCT-PT2A



PN50-21SC-PT2A